

DWC126.126-DR1-C-28W



DWC126.126-DR1-C-28W.png

Source	LED Osram; Cree; Bridgelux
Connection	Wire
Gr. Power	28W $\pm$ 5%
Input Voltage	AC85-277V
Driver	Kegu; Lifud
Control (standard)	Not dim.
Dimming option	Triac dim.; 0-10V dim.; DALI
Beam Angle (°)	15/24/36
CCT (Kelvins)	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
Lumens	2600-3000
Luminaire efficiency	107Lm/W
CRI (standard)	>80Ra
for option	>90Ra; >97Ra
Fixture Color	White; Black; White+Black
Cover	Clear; Louver
Dimensions	126*126*63 (115*115)mm
Protection Rating	Indoor Use
Electrical Class	Class II
Lifetime	>50.000h
Warranty	3 Years

Standard Packing Details


Unit Volum (CBM)	0,00287
Unit GW (kg)	0
Qty per carton	8

Other

for option: louver; flicker free driver; White frame + black reflector

DWC126.126-DR1-C-28W

Sizes drawing

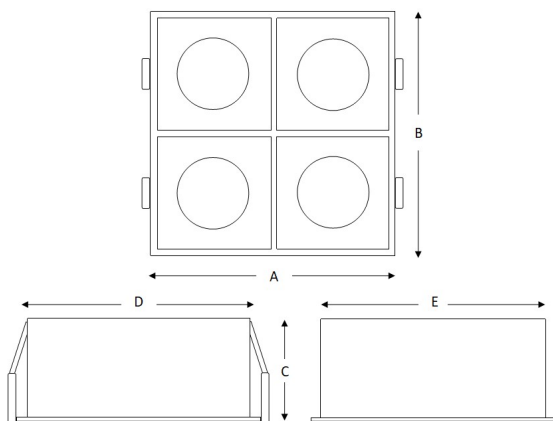


DWC126.126-DR1-C-28W.drw

in mm

Illumination Diagram

3000Lm with 24° beam

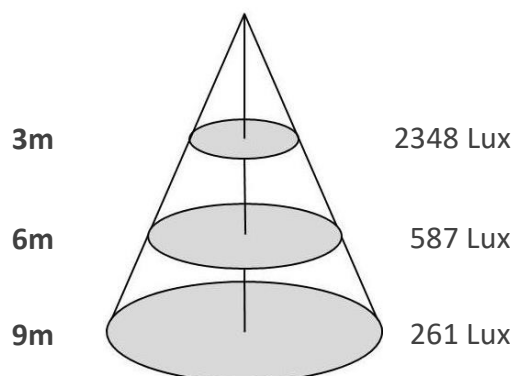

DWC126.126-DR1-C-28W.lux

