

### DWC182.65-DR1-C-21W



DWC182.65-DR1-C-21W.png

|                             |                                                |
|-----------------------------|------------------------------------------------|
| <b>Source</b>               | LED Osram; Cree; Bridgelux                     |
| <b>Connection</b>           | Wire                                           |
| <b>Gr. Power</b>            | 21W $\pm$ 5%                                   |
| <b>Input Voltage</b>        | AC85-277V                                      |
| <b>Driver</b>               | Kegu; Lifud                                    |
| <b>Control (standard)</b>   | Not dim.                                       |
| <b>Dimming option</b>       | Triac dim.; 0-10V dim.; DALI                   |
| <b>Beam Angle (°)</b>       | 15/24/36                                       |
| <b>CCT (Kelvins)</b>        | 2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K |
| <b>Lumens</b>               | 2050-2150                                      |
| <b>Luminaire efficiency</b> | 102Lm/W                                        |
| <b>CRI (standard)</b>       | >80Ra                                          |
| <b>for option</b>           | >90Ra; >97Ra                                   |
| <b>Fixture Color</b>        | White; Black; White+Black                      |
| <b>Cover</b>                | Clear; Louver                                  |
| <b>Dimensions</b>           | 182*65*53 (175*55)mm                           |
| <b>Protection Rating</b>    | Indoor Use                                     |
| <b>Electrical Class</b>     | Class II                                       |
| <b>Lifetime</b>             | >50.000h                                       |
| <b>Warranty</b>             | 3 Years                                        |

#### Standard Packing Details


|                         |         |
|-------------------------|---------|
| <b>Unit Volum (CBM)</b> | 0,00265 |
| <b>Unit GW (kg)</b>     | 0       |
| <b>Qty per carton</b>   | 9       |

#### Other

for option: louver; flicker free driver; White frame + black reflector

### DWC182.65-DR1-C-21W

Sizes drawing

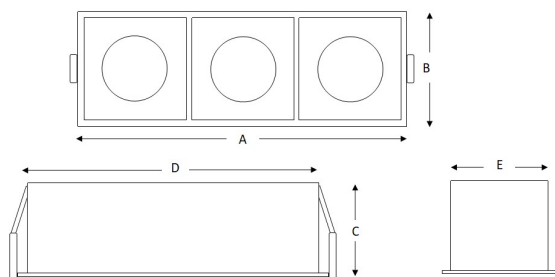


DWC182.65-DR1-C-21W.drw

in mm

Illumination Diagram

2150Lm with 24° beam

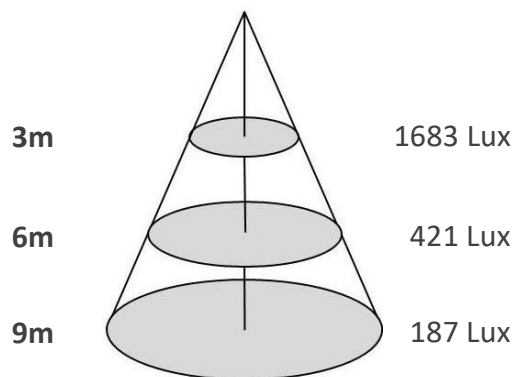

DWC182.65-DR1-C-21W.lux

