

DWR180-SOG-C-40W



Source	LED Bridgelux
Connection	Wire
Gr. Power	40W $\pm$ 5%
Input Voltage	AC85-277V
Driver	Lifud
Control (standard)	Not dim.
Dimming option	Triac dim.; 0-10V dim.; DALI
Beam Angle (°)	120
CCT (Kelvins)	2700°K; 3000°K; 4000°K; 5000°K; 6500°K; 5700°K
Lumens	4000
Luminaire efficiency	100Lm/W
CRI (standard)	>80Ra
for option	>90Ra; >97Ra
Fixture Color	White; Black
Cover	Stripped
Dimensions	Dia 180*90mm (hole 160)
Protection Rating	IP40 / IK07
Electrical Class	Class II
Lifetime	>50.000h
Warranty	3 Years

Standard Packing Details


Unit Volum (CBM)	0,00456
Unit GW (kg)	0,88
Qty per carton	20

Other

Reflector in White, Black, Silver or Gold; Cree, Citizen or Osram LED; Tridonic, Philips or Osram Driver; 5 years warranty for option

DWR180-SOG-C-40W

Sizes drawing

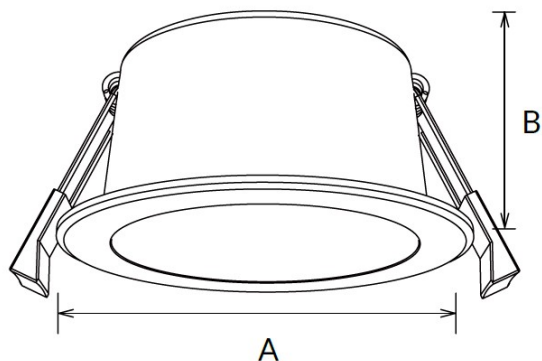


DWR180-SOG-C-40W.drw

in mm

Illumination Diagram

4000Lm with 120° beam

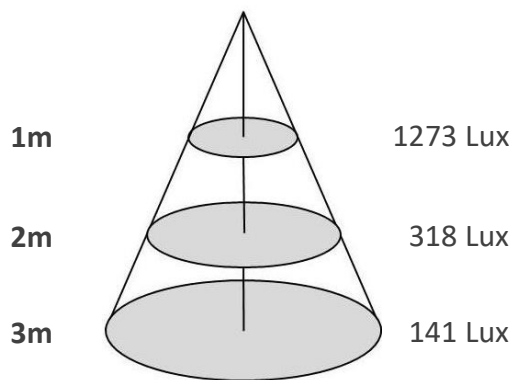

DWR180-SOG-C-40W.lux

Reflector

W	White
B	Black
CH	Chrome
BN	Brushed Nickel
BB	Brushed Brass

