

### GMB125-P-20W



GMB125-P-20W.png

|                      |                                        |
|----------------------|----------------------------------------|
| Source               | LED Bridgelux                          |
| Connection           | Wire                                   |
| Gr. Power            | 20W $\pm$ 5%                           |
| Input Voltage        | AC85-277V                              |
| Driver               | Kegu; Lifud                            |
| Control (standard)   | Not dim.                               |
| Dimming option       | Triac dim.; 0-10V dim.; DALI           |
| Beam Angle (°)       | 15/24/38                               |
| CCT (Kelvins)        | 2700°K; 3000°K; 4000°K; 5000°K; 5700°K |
| Lumens               | 1600-2500                              |
| Luminaire efficiency | 125Lm/W                                |
| CRI (standard)       | >80Ra                                  |
| for option           | >90Ra; >97Ra                           |
| Fixture Color        | White; Black                           |
| Cover                | Lens                                   |
| Dimensions           | dia125*108mm (hole110-115)             |
| Protection Rating    | IP20                                   |
| Electrical Class     | Class II                               |
| Lifetime             | >50.000h                               |
| Warranty             | 3 Years                                |

#### Standard Packing Details


|                  |         |
|------------------|---------|
| Unit Volum (CBM) | 0,00300 |
| Unit GW (kg)     | 1,2     |
| Qty per carton   | 9       |

#### Other

Optional: Flicker free driver; 5 years warranty extension (with Tridonic driver)

### GMB125-P-20W

Sizes drawing

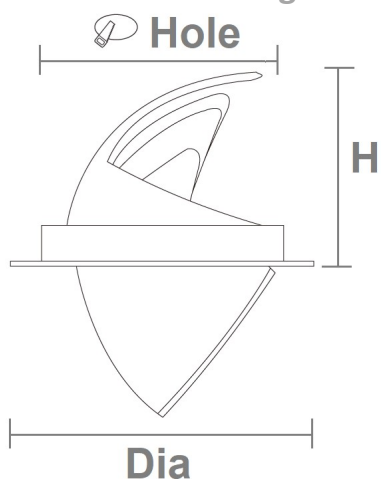


GMB125-P-20W.drw

in mm

Illumination Diagram

2500Lm with 38° beam

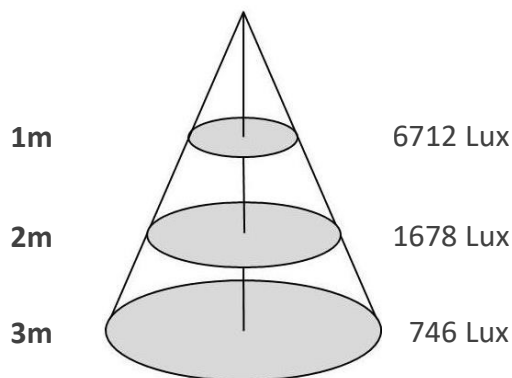

GMB125-P-20W.lux

