

GMB140-P-30W



GMB140-P-30W.png

Source	LED Bridgelux
Connection	Wire
Gr. Power	30W $\pm$ 5%
Input Voltage	AC85-277V
Driver	Kegu; Lifud
Control (standard)	Not dim.
Dimming option	Triac dim.; 0-10V dim.; DALI
Beam Angle (°)	15/24/38
CCT (Kelvins)	2700°K; 3000°K; 4000°K; 5000°K; 5700°K
Lumens	2900-3600
Luminaire efficiency	120Lm/W
CRI (standard)	>80Ra
for option	>90Ra; >97Ra
Fixture Color	White; Black
Cover	Lens
Dimensions	dia140*115mm (hole125-130)
Protection Rating	IP20
Electrical Class	Class II
Lifetime	>50.000h
Warranty	3 Years

Standard Packing Details


Unit Volum (CBM)	0,00496
Unit GW (kg)	1,5
Qty per carton	9

Other

Optional: Flicker free driver; 5 years warranty extension (with Tridonic driver)

GMB140-P-30W

Sizes drawing

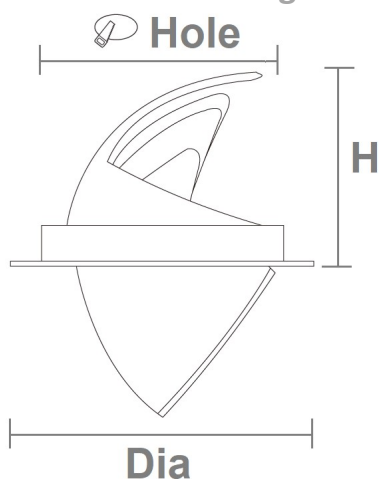


GMB140-P-30W.drw

in mm

Illumination Diagram

3600Lm with 38° beam

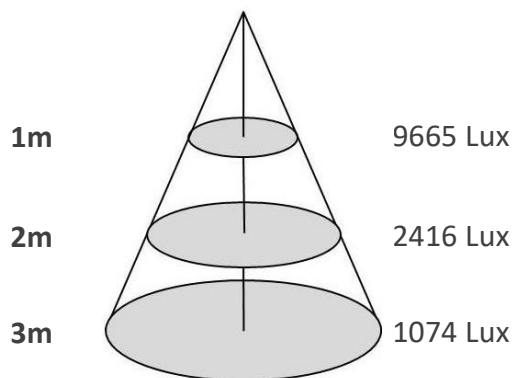

GMB140-P-30W.lux

