

Flood light

PROJ-FK-P-100W



PROJ-FK-P-100W.png

Source	LED
Connection	Wire
Gr. Power	100W ±5%
Input Voltage	AC100-277V
Driver	Lifud; Sosen
Control (standard)	Not dim.
Dimming option	1-10V dim; DALI
Beam Angle (°)	30/60/90/120/T2M/T3M
CCT (Kelvins)	3000°K; 4000°K; 6500°K

Lumens	15000
Luminaire efficiency	150Lm/W
CRI (standard)	>80Ra
for option	
Fixture Color	Black; Silver; Grey
Cover	Clear
Dimensions	369*278*52mm
Protection Rating	IP66/IK08
Electrical Class	Class I
Lifetime	>50.000h
Warranty	5 Years

Standard Packing Details

Unit Volum (CBM)	0,05508
Unit GW (kg)	4
Qty per carton	2


Other

Option: Marine corrosion coating; Flicker free driver; MeanWell Driver; 3 years ECO version

Flood light


PROJ-FK-P-100W

Sizes drawing

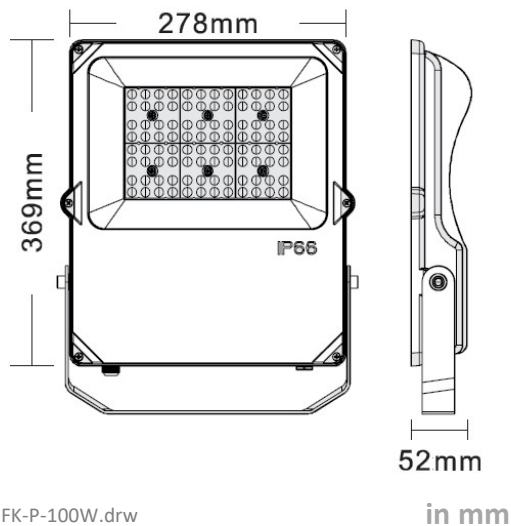

Illumination Diagram

15000Lm with 60° beam

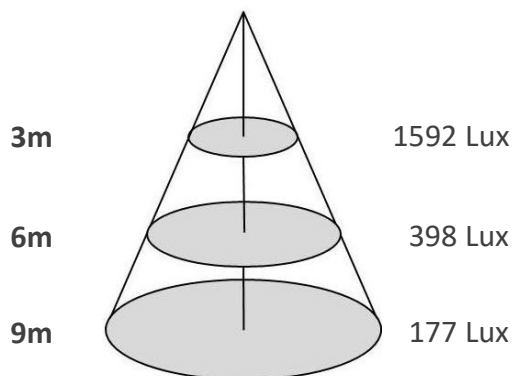

PROJ-FK-P-100W.lux

