

Inground Light

SOLEN116-P-COB-5W

Picture



Description

| | |
|------------|--------------------|
| Type | LED Inground Light |
| Connection | Wire |

Electrical Parameters

| | |
|--------------|--------------|
| Gr. Power | 5W ±5% |
| InputVoltage | DC24V |
| Driver | Not Included |
| Dimmable | Not dim. |

Lighting Parameters

| | |
|------------|---------------------------------|
| Beam Angle | 10/20/30/28*70° |
| Colors | WW; DL; CW; Red; Green; Blue; Y |
| Lumens | 400 |
| CRI | 80Ra |

Structure Parameters

| | |
|---------------|--------------------------|
| Fixture Color | SS316 |
| Cover | Clear; Louver |
| Dimensions | dia116*78(102(74)*150)mm |


Protection Parameters

| | |
|------------------|--|
| Rating | IP67/IK08 |
| Electrical Class | Class I <input type="checkbox"/> Class II <input checked="" type="checkbox"/> Class III <input type="checkbox"/> |
| Lifetime | >50.000h |
| Warranty (Years) | 3 |

Options

| | |
|------------|--|
| Dimmable * | Triac <input checked="" type="checkbox"/> 0-10V <input checked="" type="checkbox"/> 1-10V <input checked="" type="checkbox"/> DALI <input checked="" type="checkbox"/> |
| CRI | >90Ra <input type="checkbox"/> >92Ra <input type="checkbox"/> >95Ra <input type="checkbox"/> >98Ra <input type="checkbox"/> |
| Other | available in AC240V; RGB (DC24V); RGBW(DC24V) IK10 for option |

* Can work with different kind of dimmable drivers (not included)

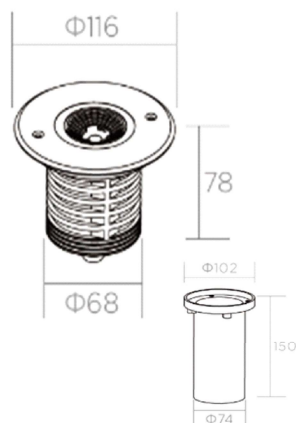

Sizes in mm

Packing

| | |
|-----------------|------------|
| UnitVolum (CBM) | 0,00301665 |
| Unit GW (kg) | 1,1 |
| Qty per carton | 18 |