

## Inground Light

### SOLINE500.80-P-12W

#### Picture



#### Description

<b>Type</b>	LED Inground Light
<b>Connection</b>	Wire

#### Electrical Parameters

<b>Gr. Power</b>	12W ±5%
<b>InputVoltage</b>	DC24V
<b>Driver</b>	Not Included
<b>Dimmable</b>	Not dim.

#### Lighting Parameters

<b>Beam Angle</b>	5/8/10/15/30/35/45/60°/Asym.
<b>Colors</b>	WW; DL; CW
<b>Lumens</b>	80Lm/W
<b>CRI</b>	80Ra

#### Structure Parameters


<b>Fixture Color</b>	White; Black; Silver; Grey
<b>Cover</b>	Clear; Frosted
<b>Dimensions</b>	500*80*69mm

#### Protection Parameters

<b>Rating</b>	IP67/IK09
<b>Electrical Class</b>	Class II
<b>Lifetime</b>	>50.000h
<b>Warranty (Years)</b>	3

#### Options

<b>Dimmable</b>	Triac <input type="checkbox"/> 0-10V <input type="checkbox"/> 1-10V <input type="checkbox"/> DALI <input type="checkbox"/>
<b>CRI</b>	>90Ra <input type="checkbox"/> >92Ra <input type="checkbox"/> >95Ra <input type="checkbox"/> >98Ra <input type="checkbox"/>
<b>Other</b>	Optional: RGB/RGBW; asymetrical beam: 10*30/10*60/15*45/15*60/20*40/30*60°

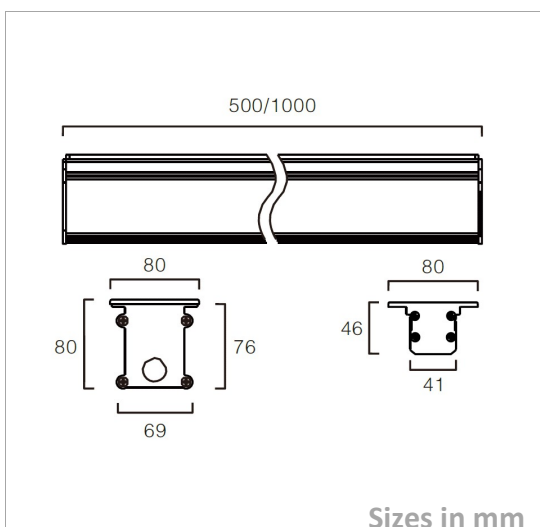

#### Packing

<b>UnitVolum (CBM)</b>	0,005508
<b>Unit GW (kg)</b>	2,3
<b>Qty per carton</b>	6